

PUMPING STATIONS IN POLYETHYLENE PEDROLLO— TRITUS TRm with grinder

WITH 1 PUMP, SMALL FLOW RATES, CLEAN WATER, MODELS PEDROLLO TRITUS TRm

Ref.	L.	H.	Diam IN	Diam out	H In	H out	Manho- le	Weight	N° pumpes	Voltage	Consump
PP850/1/TRITUS	930	1.680	110	50/63	1.100	1.350	600	73	1	230	0,600
PP850/2/TRITUS	930	1.680	110	50/63	1.100	1.350	600	96	2	230	1,200

Model PEDROLLO TRITUS TRm

For pumping very slightly polluted water.

Free opening max: 20 mm.

Minimum vacuum height: 50 mm.

Enclosure in cast iron, filter and impeller in techno polymer.

Motor mono 230V (50hz), 2900 tr/min, IPX8, class F.

Axis stainless steel EN 10088-3, internal motor housing in epoxy treated cast iron.

Double seal and oil bath.

Float switch and thermal safety.

Delivered with 10 m cable.

Maximum liquid temperature: 40°C

Maximum head 23 meter


Maximum flow rate 120 l/min.

Equipped with control unit with alarm

Equipped with sieve basket at the inlet

Knife in tempered stainless steel.

These pumps are suitable for sewage water with larger particles, such as fecal water from houses or after a septic tank, ...

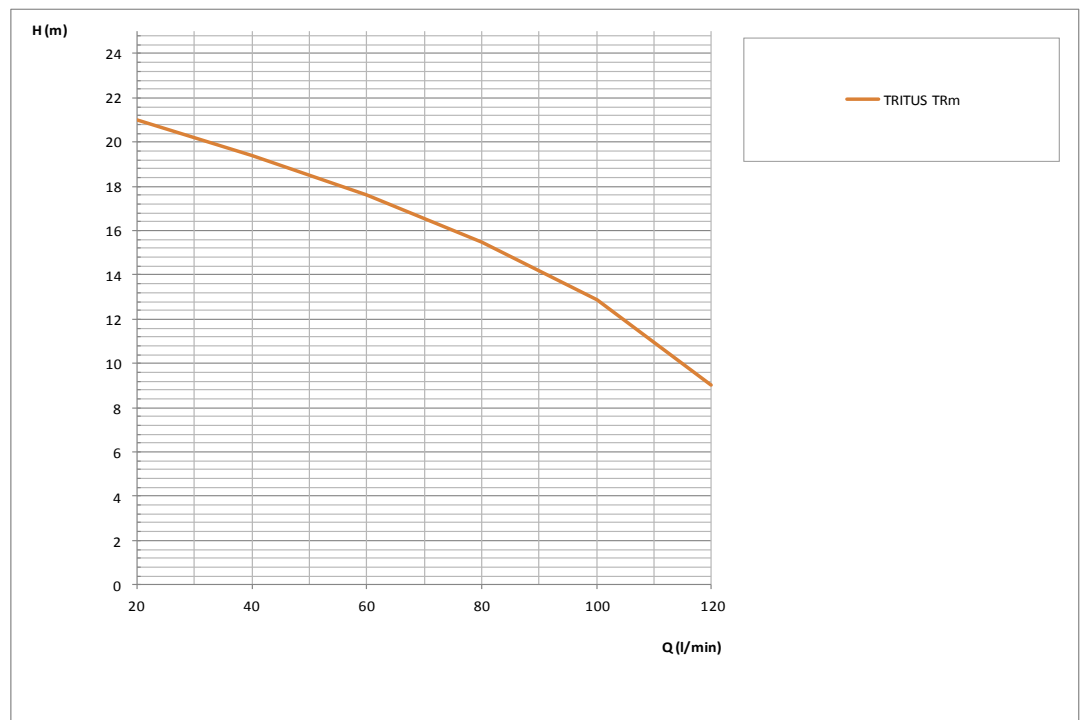

Boralit NV—Version 2017

Nijverheidslaan 12, BE 9880 Aalter—Belgium—2016

Tel: +32 (0)9 375 11 11 Fax: +32 (0)9 375 22 22

E-mail: sales@boralit.be

www.boralit.com

BORALIT

plastic tank solutions